

AC70P (1000W,864Wh)


POWER FOR ALL YOUR NEED





Designed to Up-level Your Outdoor Experience

Elevate your on-the-go power solutions with the BLUETTI AC70P Power Station! Boasting a robust 864Wh capacity and a 1,000W continuous power, it e ortlessly energizes your essential devices during outdoor adventures, RV escapades, or cozy moments at home. The lightweight and portable design ensures non-stop power is always at your service whenever you need.





Up to 2,000W Lifting PowerPower More High-powered Appliances

With a rated power of 1,000W, AC70P can handle 98% of outdoor and home appliances. It also features a Power Lifting Mode that boosts the power up to 2,000W, enabling it to run high-powered resistive loads e ortlessly, such as electric grills, hairdryers, kettles, and more.



















1.8 Hours









Power Bank Mode Extended Outdoor Fun

Worry about power running out during your journey? AC70P is compatible with B80P (806Wh), B230 (2,048Wh), and B300 (3,072Wh) for prolonged battery life.



Multiple Charging Options Get Charged in Any Way You Like

AC70P gives you the freedom to recharge your devices in any way you prefer: wall charging, solar charging, car charging, generator charging, or LiFePO battery charging. Whether you are at home, on the road, or outdoors, you can always find a suitable power source for AC70P.






High-Efficient PV Charging


Ensure endless power supply while exploring the great outdoors.



Super-fast 950W Turbo Charging

With BLUETTI Turbo Charging Technology, you no longer have to wait a long time to get it charged. The fast charging allows you to replenish it at your last-minute pack-up, ensuring your power is at the ready before you hit the road.

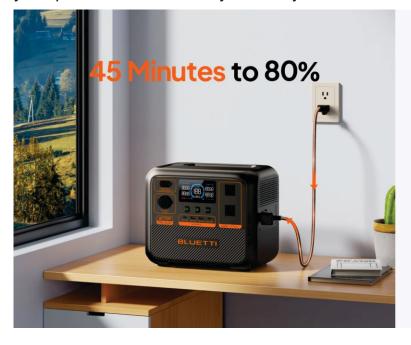

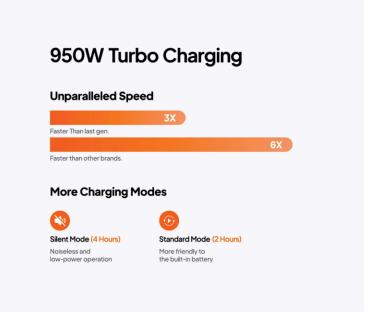





Specifications

Model	AC70P			
Country / Region	JP	US	CN	EU/UK/AU
Battery Capacity	864Wh			
Cell Type	LiFePO ₄			
AC + DC Input	1000W Max.			
Net Weight	10.2kg / 22.5lbs			
Dimensions (L*W*H)	314mm × 209.5mm × 255.8mm / 12.4in × 8.2in × 10.1in			
Charging Temperature	0°C-40°C/32°F-104°F			
Discharging Temperature	-20°C-40°C/-4°F-104°F			
Storage Temperature	-20°C-40°C /-4°F-104°F			
Working Humidity	10%-90%			
Country / Region	JP	US	CN	EU/UK/AU
	AC (Dutput		
Power	1000W in total			
Voltage	100VAC	120VAC	220VAC	230VAC
Current	10A	8.3A	4.5A	4.3A
Frequency	50Hz / 60Hz			
	DC (Dutput		
Cigarette Lighter Port	12VDC / 10A			
USB-A*2	5VDC / 2.4A each port			
USB-C*2	5/9/12/15/20VDC, 3A; 20VDC, 5A each port			
Wireless Charging	5W/7.5W/10W/15W			
	AC	Input		
Voltage	100VAC	120VAC	220VAC	230VAC
Max. Current	9A	9A	6A	6A
Frequency	50Hz/60Hz			
UPS	Switching time ≤20ms			
Power	900W Max.	950W Max.	950W Max.	950W Max.
	(0%-80% in 45 minutes @ 25°C / 77°F)			





Specifications

DC Input				
Interface	XT60PM-M			
Power	500W Max.			
Current	10A Max.			
Voltage	12V-58VDC			
Bluetooth 5.0 / 5.1				
Max. Transmission Frequency	125kbps			
Max. RF Transmission Power	+12dBm			
Receiver Sensitivity	-99dBm/1Mbps			
Wireless Charging				
Transmission Frequency Range	110k-205kHz			
Max. RF Transmission Power	15W			